
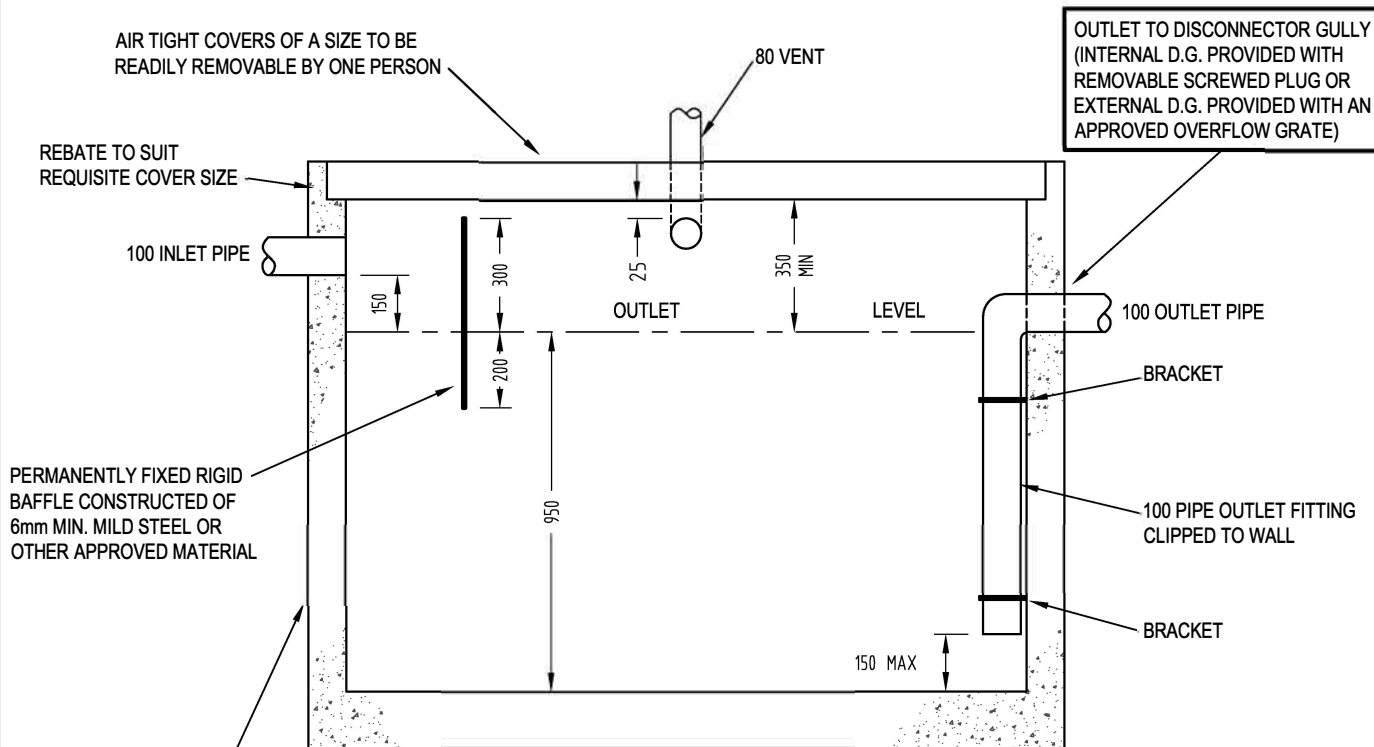
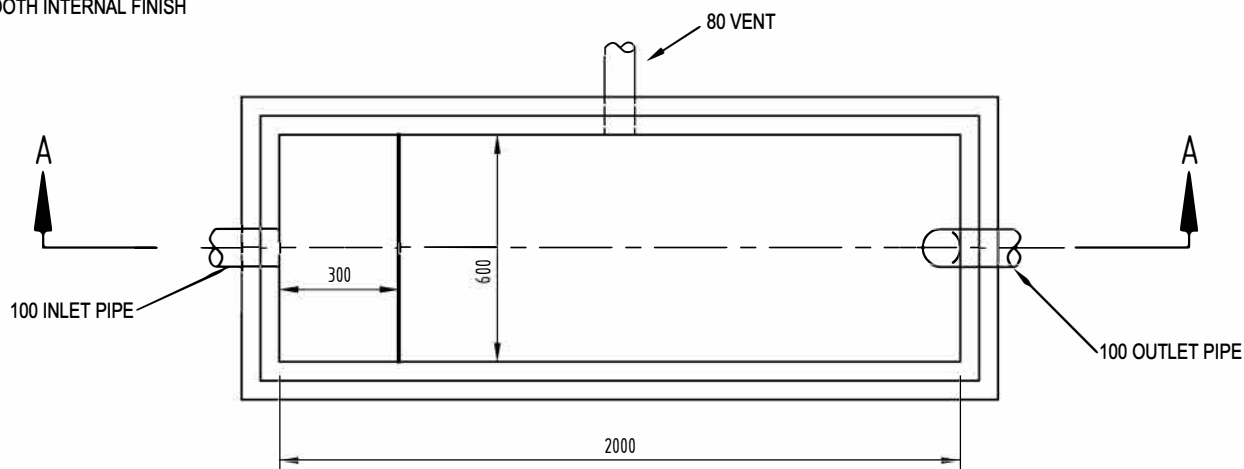


PROJECT NUMBER:	MELWAY REFERENCE:	AUTHORISED:	AUTHORISED TO PROCEED:	REV.	DESCRIPTION	DATE	APP'D
DESIGNED: M. ABRAHAM				0	ISSUED AS STANDARD DRAWING	08/09/10	
DATE: 19/06/06							
CHECKED:							
DATE:		DATE: / /	DATE: / /				

OIL INTERCEPTOR



SECTION A - A



PLAN
(COVER REMOVED)

NOTES:

1. THE CAPACITY OF INTERCEPTOR BELOW THE INVERT OF THE OUTLET SHALL BE SPECIFIED BY GREATER WESTERN WATER. THE MINIMUM CAPACITY OF THE INTERCEPTOR SHALL BE 1.140 KILOLITRES. (THE CAPACITY OF THE INTERCEPTOR SHOWN IS 1.140 KILOLITRES.)
2. THE INTERCEPTOR IS TO BE CONSTRUCTED, INSTALLED AND CONNECTED IN ACCORDANCE WITH THE RELEVANT PLUMBING REGULATIONS.
3. WHERE SUBJECT TO TRAFFIC LOADINGS, SUITABLE COVERS CAPABLE OF WITHSTANDING SUCH LOADS SHALL BE PROVIDED.
4. THE VENT IS TO BE EXTENDED TO OPEN AIR IN ACCORDANCE WITH THE RELEVANT PLUMBING REGULATIONS.
5. THE 100mm DIA C.I.P. OUTLET FITTING TO BE MANUFACTURED IN ONE PIECE.
6. POLYVINYL CHLORIDE (P.V.C.) SHALL NOT BE USED FOR THE CONSTRUCTION, CONNECTION OR VENTING OF THIS UNIT.
7. THIS INTERCEPTOR MAY ACCUMULATE QUANTITIES OF EXPLOSIVE AND/OR INFLAMMABLE MATERIALS AND CARE SHOULD BE EXERCISED IN THE MAINTENANCE AND GENERAL USE OF THE UNIT.
8. THE INTERCEPTOR MUST BE LOCATED IN A POSITION SO AS TO PROVIDE READY ACCESS FOR MAINTENANCE (e.g.) PUMP OUT) AND INSPECTION PURPOSES.
9. ALL DIMENSIONS ARE IN MILLIMETRES.

THIS DRAWING SUPERSEDES TRADE WASTE DRG. No. 10B



TRADE WASTE
STANDARD DRAWING
PETROL & OIL INTERCEPTOR

SCALE: NTS @ A4

SHEET: 1 OF 1

DRAWING No.:

TW-STD-010 0